1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 31mm

EAN


YJ-X11290300265023

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality
Polypropylene Rubber (TPR) Wheel Tread Reinforced Pearl-gray finish, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Metric O Imperial

Wheel Diameter 75mm

Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Length 29mm

Offset 42.5mm

Swivel Interference 160mm

Overall Height 116mm

Swivel Radius 80mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 90kgs

Load Capacity (Static) 135kgs

Temperature -20°C to +60°C

Fork Type **Swivel Caster**

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight

Standard

0.50kgs

ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

 \bullet \bullet \circ \circ \circ


Floor Surface Preservation • • • • • •

Dimensions





Mounting

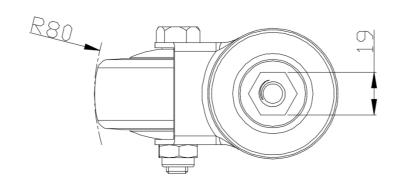

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.