1129 Medical Caster Series

Dersheng Casters Keep Rolling

Rubber Wheel Diameter × Wheel Width 100 x 30.5mm

EAN

YJ-X11290400062013

Swivel Caster with Riveted Fork and Stamping Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole

80±5° Shore A

Spacing

Zine-Plated, Top Plateed Mounting Type Reinforced Polypropylene core with High-Quality Resilient Rubber Wheel Tread Bearing - Plain Bearing.

Wheel surface: high-quality elastic rubber Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Hardness Of Tread

4 '' Wheel Diameter

1-1/4 " Wheel Width

Wheel Bearing Wheels With Ball Bearings 3-13/16 " x 2-7/8 "

Plate Size **Bolt Hole Spacing** 3" x 1-13/16"

1/2 " x 3/8 " Plate Hole Offset 1-5/8 "

7-1/8 " Swivel Interference 5-1/2 " Overall Height 3-9/16 " Swivel Radius

331lbs Load Capacity (Dynamic) Load Capacity (Static) 496lbs

Temperature -4°F to +248°F Fork Type **Swivel Caster**

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.9lbs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • • •

Dimensions





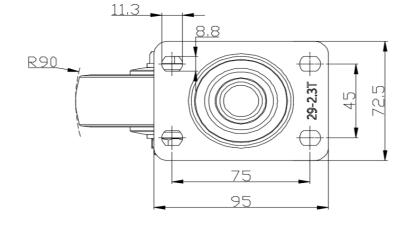

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.