1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Plain Bearing) (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN

YJ-X11290400262033

Swivel Caster with Riveted Fork and Stamping Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing

Zine-Plated, Mounting Type - Top Plate High-Quality Impact-Resistant Polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Pearl-gray finish, Plain Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 95 x 72.5mm **Bolt Hole Spacing** 75 x 45mm Plate Hole 11.3 x 8.8mm Offset 40mm Swivel Interference 180mm Overall Height 139.5mm Swivel Radius 90mm

Hardness Of Tread 82±5° Shore A

80kgs Load Capacity (Dynamic) Load Capacity (Static) 120kgs -20°C to +60°C Temperature Swivel Caster Fork Type

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.69kgs ISO22883 Standard


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

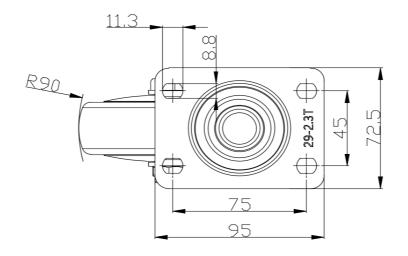

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.