



1129 Medical Caster Series

PPR (Plain Bearing) (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN

YJ-X11290400264033

Total Brake locking system. Top Plate with Riveted, Stamping Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.  
Zine-Plated, Mounting Type - Top Plate.  
High-Quality Impact-Resistant Polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.  
Dark gray, Plain Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                |
| Wheel Diameter                                                         | 100mm                          |
| Wheel Width                                                            | 31mm                           |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Plate Size                                                             | 95 x 72.5mm                    |
| Bolt Hole Spacing                                                      | 75 x 45mm                      |
| Plate Hole                                                             | 11.3 x 8.8mm                   |
| Offset                                                                 | 40mm                           |
| Swivel Interference                                                    | 210mm                          |
| Overall Height                                                         | 139.5mm                        |
| Swivel Radius                                                          | 105mm                          |
| Hardness Of Tread                                                      | 82±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 100kgs                         |
| Load Capacity (Static)                                                 | 150kgs                         |
| Temperature                                                            | -20°C to +60°C                 |
| Fork Type                                                              | Swivel Caster With Total Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 0.76kgs                        |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

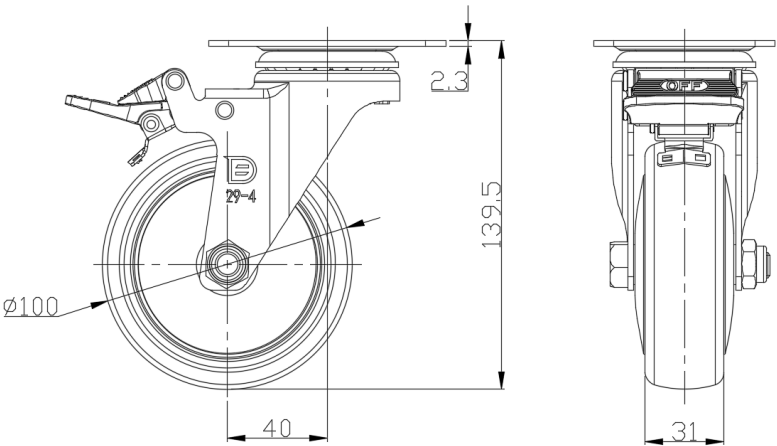

Mounting

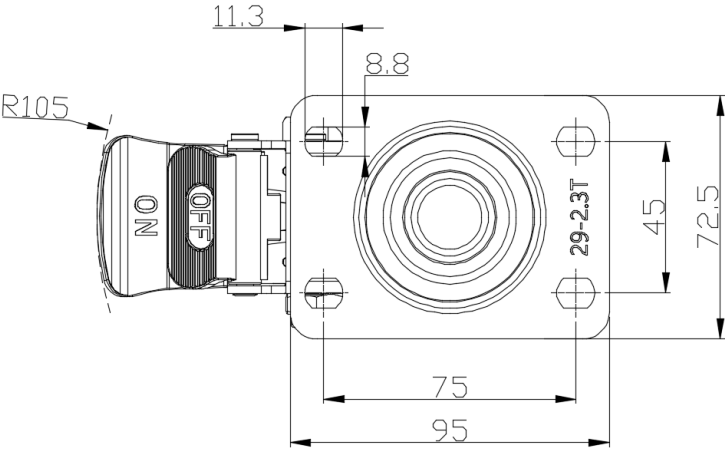

\* For any deviation between metric and imperial spec, please refer to the metric spec.