1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


YJ-X11290400266923

Castors with Total Brake Locking system. Thread Riveting Stamping Tripod—M12- P1.75 Extended control lever surface, Threaded Stem installation, exquisite appearance, plastic cover decoration High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) wheel tread Pearlite dark grey, Bearing – Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 25mm

Offset 40mm

Swivel Interference 210mm

Overall Height 141mm

Swivel Radius 105mm

Hardness Of Tread 82+5° Shore

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 80kgs
Load Capacity (Static) 120kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.76kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • 0

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

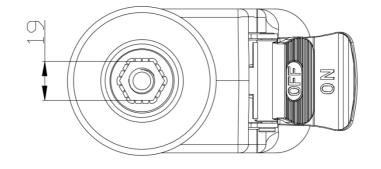

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.