1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


YJ-X11290400266923

Castors with Total Brake Locking system. Thread Riveting Stamping Tripod—M12- P1.75 Extended control lever surface, Threaded Stem installation, exquisite appearance, plastic cover decoration High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) wheel tread Pearlite dark grey, Bearing – Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 1 "

Offset 1-5/8 "

Swivel Interference 8-3/8 "

Overall Height 5-9/16 "

Swivel Radius 4-3/16 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 176lbs

Load Capacity (Static) 265lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.7lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • 0


Operating Noise

 \bullet \bullet \circ


Floor Surface Preservation • • • • •

Dimensions





Mounting

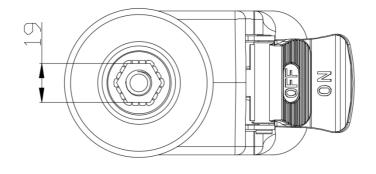

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.