1129 Medical Caster Series

Dersheng Casters Keep Rolling

Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 100 x 31mm


EAN

YJ-X11290400454033

Castors with Total Brake, directional 90° Locking system. Bottom plate riveting stamping foot Rack - Advanced Hole Extended control lever surface, Top Plate installation High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) wheel tread Dark grey, Bearing – Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 95 x 72.5mm **Bolt Hole Spacing** 75 x 45mm Plate Hole 11.3 x 8.8mm 40mm Offset Swivel Interference 210mm Overall Height 139.5mm **Swivel Radius** 105mm Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic)

Load Capacity (Static)

Temperature

72±5° Shore A

125kgs

187.5kgs

-20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.67kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

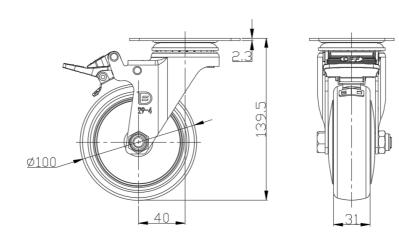

Mounting

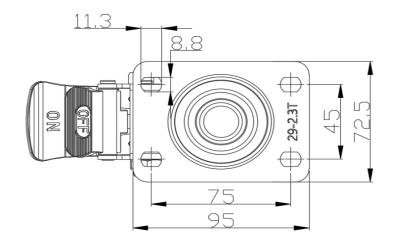

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.