1129 Medical Caster Series

DERSHENG

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-X11290500261013

Rigid Caster with Stamping Fabricated Caster Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing Zine-Plated, Mounting Type - Top Plate High-quality Impact Resistance Polypropylene core with High-Quality Thermoplastic Rubber (TPR) tread Pearl-gray finish, Bearing—Ball Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Imperial O Met	ric
----------------	-----

Wheel Diameter 5 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 3-11/16 " x 2-1/2 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 1/2 " x 23/64 "

Overall Height 6-1/2 "
Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic)243lbsLoad Capacity (Static)364lbsTemperature-4°F to +140°FFork TypeRigid CasterStainlessN/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.3lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \bullet \circ


Operating Noise

• • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

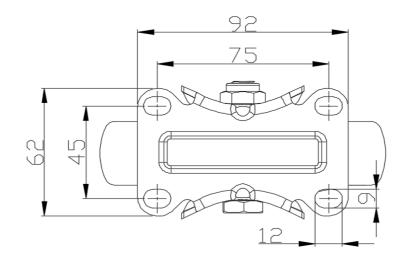

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.