# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN


#### YJ-X11290500266033

Castors with Total Brake Locking system. Thread Riveting Stamping Tripod—M16-P2.0 Extended control lever surface, Threaded Stem installation device High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread, exquisite appearance plastic cover decoration Pearlite dark grey, Bearing – Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M16-P2.0

Threaded Size 30mm

Offset 37.5mm

Swivel Interference 210mm

Overall Height 166mm

Swivel Radius 105mm

Hardness Of Tread 82±5° Shore A

Hardness Of Tread 82±5 Shore A

Load Capacity (Dynamic) 100kgs
Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.89kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

 $\bullet$   $\bullet$   $\circ$ 


Operating Noise

Floor Surface Preservation • • • • •

### **Dimensions**

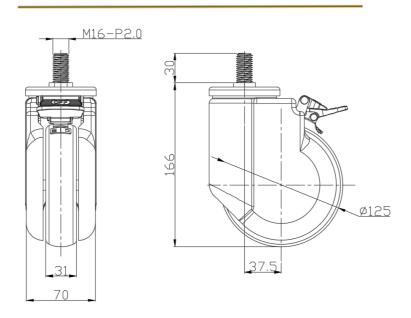

Mounting

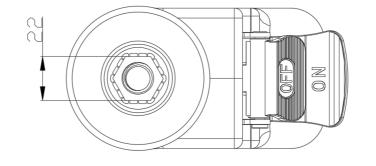

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.