

1129 Series

Classic PPR wheel(Pearlescent dark gray) wheel diameter × wheel width 125 x 31mm


EAN

YJ-X11290500267013

Swivel castor, hollow riveted stamped foot frame - Ø12.5
Surface galvanized, hollow rivet mounting device
Impact-resistant polypropylene wheel core, thermoplastic elastomer (TPR) wheel tread
Pearl-colored dark gray, wheel bearing - precision ball.

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel core: Made of high-quality impact-resistant polypropylene

Product descriptions are for reference only. The actual product shall prevail.

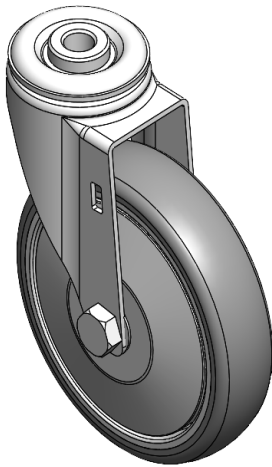

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	125mm
Wheel Width	31mm
Wheel Bearing	wheel equipped with ball bearings
hollow rivet diameter	12.5mm
Offset	37.5mm
Swivel Interference	200mm
Overall height	160.5mm
Swivel Radius	100mm
Hardness of tread	82±5° Shore A
Load capacity (dynamic)	100kgs
Load capacity (static)	150kgs
Temperature	-20°C to +60°C
Stand Style	activity
Stainless steel	N/A
Conductive	N/A
Anti	N/A
Weight	0.68kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

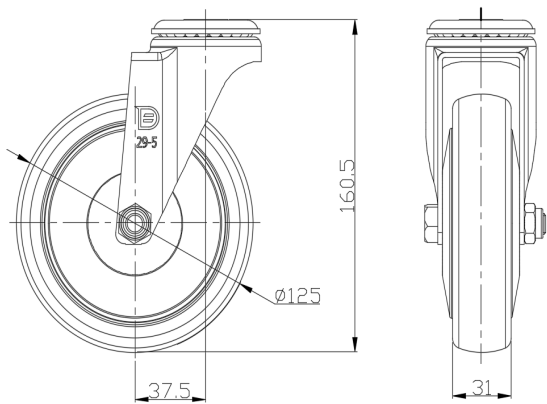

Mounting

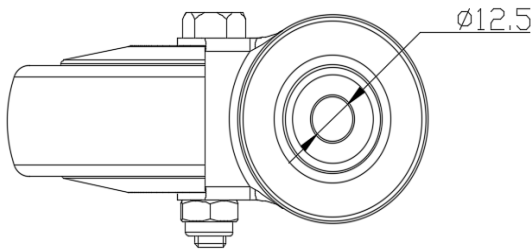

Drawings are for reference only and may differ from the product.

* For any deviation between metric and imperial spec, please refer to the metric spec.