1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-X11290500268043

Castors with Total Brake Locking system. Insert riveting stamping Fork-Ø28x31L Extended control lever surface, plug-in installation, M8 thread High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) wheel tread Dark grey, Bearing – Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

ic

Wheel Diameter 6 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

Diameter 1-1/8 "

Stem Hole Spec 1-1/4 "

Offset 1-1/2 "

Swivel Interference 8-3/8 "

Overall Height 6-7/16 "

Swivel Radius 4-3/16 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 243lbs

Load Capacity (Static) 364lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A


Anti-Static N/A

Weight 1.9lbs


Standard ISO22883

Advantages at a glance

Dimensions

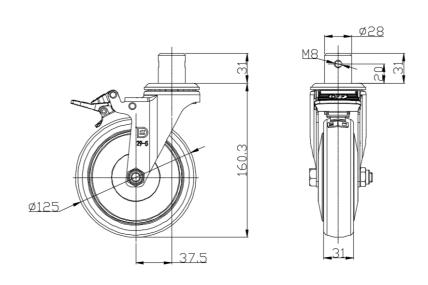

Mounting

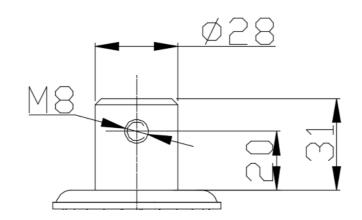

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.