1129 Medical Caster Series

Dersheng Casters Keep Rolling

W Resolute (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-X11290500455013

Swivel castors. Thread Riveting Stamping Tripod—M16-P2 Extended control lever surface, Threaded Stem installation device Reinforced impact-resistant High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) wheel tread Pearlite dark grey, Bearing – Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

	Imperial	\bigcirc	Metric
--	----------	------------	--------

Wheel Diameter 5 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M16-P2
Threaded Size 1-3/16 "

Offset 1-1/2 "

Swivel Interference 8-3/8 "

Overall Height 6-9/16 "

Swivel Radius 4-3/16 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 324lbs

Load Capacity (Static) 486lbs

Temperature -4°F to +140°F
Fork Type Swivel Caster


StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight1.6lbsStandardISO22883


Advantages at a glance

Rolling Resistance


Floor Surface Preservation • • • • •

Dimensions





Mounting

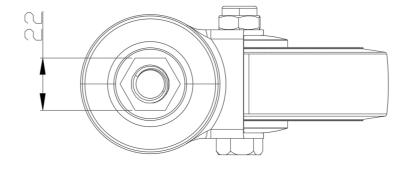

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.