

1129 Series

Classic PPR wheel(Pearlescent dark gray) wheel diameter × wheel width 125 x 31mm


EAN

YJ-x11290500268053

Castors with double brake and locking system. Hollow riveted stamped feet – Ø12.5
Surface galvanized, hollow rivet mounting
Impact-resistant polypropylene wheel core, thermoplastic elastomer (TPR) wheel tread
Dark grey, wheel bearings – precision ball.

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel core: Made of high-quality impact-resistant polypropylene

Product descriptions are for reference only. The actual product shall prevail.

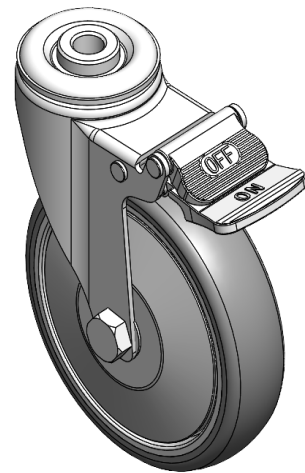

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	125mm
Wheel Width	31mm
Wheel Bearing	wheel equipped with ball bearings
hollow rivet diameter	12.5mm
Offset	37.5mm
Swivel Interference	210mm
Overall height	160.5mm
Swivel Radius	105mm
Hardness of tread	82±5° Shore A
Load capacity (dynamic)	100kgs
Load capacity (static)	150kgs
Temperature	-20°C to +60°C
Stand Style	Double Elimination
Stainless steel	N/A
Conductive	N/A
Anti	N/A
Weight	0.59kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

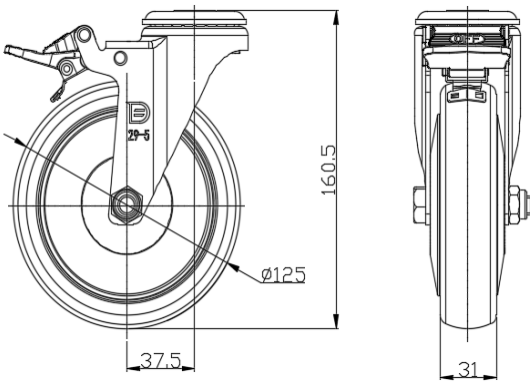

Mounting

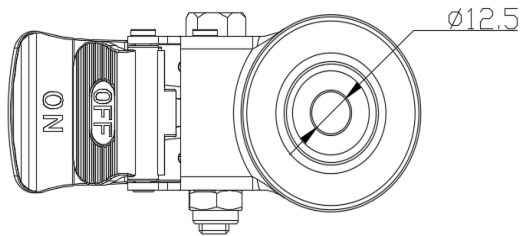

Drawings are for reference only and may differ from the product.

* For any deviation between metric and imperial spec, please refer to the metric spec.