1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-x11290500268053

Castors with Total Brake Locking system. Single Bolthole Fork – \emptyset 12.5 Surface Zine-Plated, Mounting Type - Single Bolthole High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Dark grey, Bearing – Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter

Wheel Width 1-1/4"

Wheel Bearing Wheels With Ball Bearings

5 "

Single Bolt HoleCentre Hole

Offset 1-1/2 "
Swivel Interference 8-3/8 "
Overall Height 6-7/16 "
Swivel Radius 4-3/16 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight1.3lbsStandardISO22883

Advantages at a glance

Rolling Resistance


• • • • 0


Operating Noise

 \bullet \bullet \bullet \circ


Floor Surface Preservation • • • • •

Dimensions





Mounting

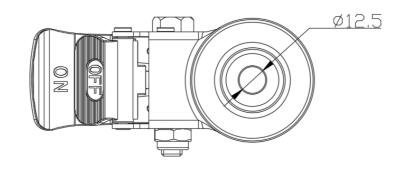

 $^{{}^{*}}$ For any deviation between metric and imperial spec, please refer to the metric spec.