

## 1157 57 Series Caster Series

EQPU (brown arc) Wheel Diameter x Wheel Width 150 x 42mm

EAN


KS-11570600554141

Caster with front brake and With locking system, Welded Caster Fork  
 Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing  
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown  
 Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

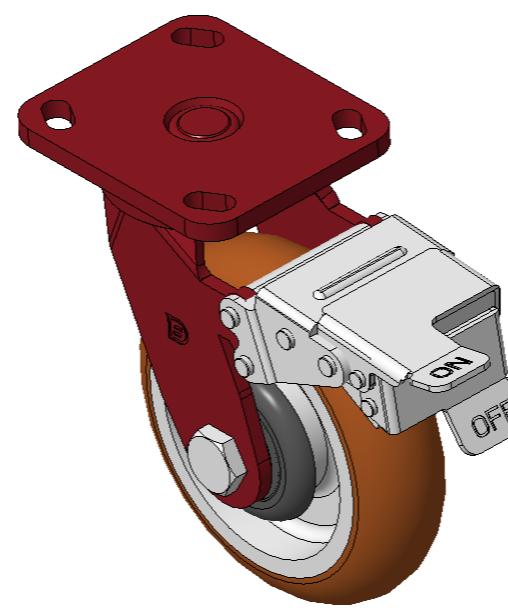

Picture may differ from original product

## Technical Data

 Imperial  Metric

Wheel Diameter 6 "

Wheel Width 1-11/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4-3/8 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Offset 1-11/16 "

Swivel Interference 13-1/2 "

Overall Height 7-9/16 "

Swivel Radius 6-3/4 "

Hardness Of Tread 94±5° Shore A

Load Capacity (Dynamic) 1213lbs

Load Capacity (Static) 1819lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 9.1lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • • ○


Operating Noise • • • • •

Floor Surface Preservation • • • • •

## Dimensions

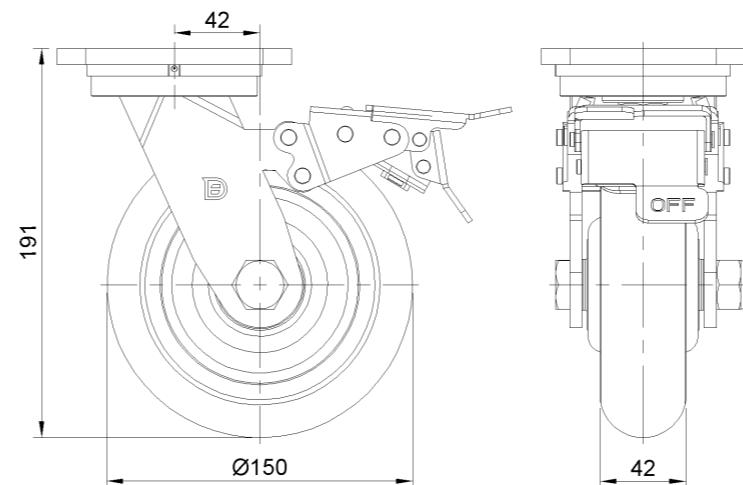

## Mounting

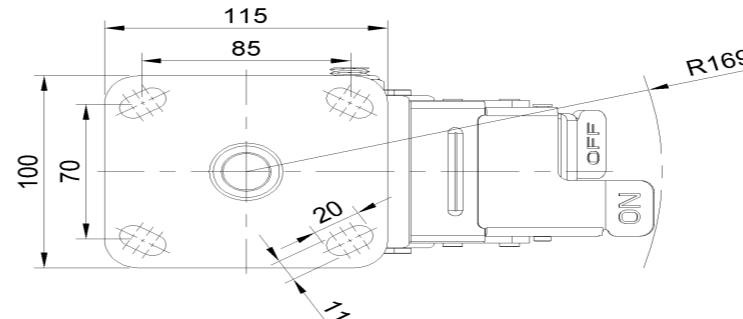

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com