# 1112 2" Wide General Purposes Caster Series

AQPU (brown) Wheel Diameter × Wheel Width 150 x 42mm


EAN

TW-111206004A006

Casters with front brake and With locking system. Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Aluminum wheel center, High Quality Polyurethane Wheel Tread Brown color, Bearing—Ball Bearings

Wheel tread: high quality polyurethane Wheel Center: aluminum core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 42mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 36mm Swivel Interference 310mm Overall Height 190mm **Swivel Radius** 155mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 450kgs
Load Capacity (Static) 675kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.40kgs

Standard ISO22883

#### Advantages at a glance


Rolling Resistance

• • •


Operating Noise

Floor Surface Preservation • • • • •

### Dimensions

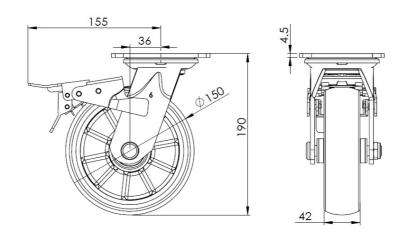

## Mounting

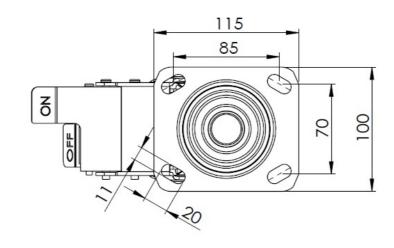

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.