# 1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

NBR (black) Wheel Diameter × Wheel Width 125 x 40 mm


EAN

TW-4111205001038

Rigid Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron Wheel Center with High-Quality Resilient Rubber tread Black, Bearing—Ball Bearing.

Wheel Tread: high-quality elastic rubber Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### **Technical Data**

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Overall Height 167mm Hardness Of Tread 85±5° Shore A Load Capacity (Dynamic) 200kgs Load Capacity (Static) 300kgs Temperature -20°C to +80°C Rigid Caster

Fork Type Rigid Cast
Stainless N/A
Electrical Conductivity N/A
Anti-Static N/A
Weight 2.60kgs
Standard ISO22883

## Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

#### **Dimensions**





## Mounting

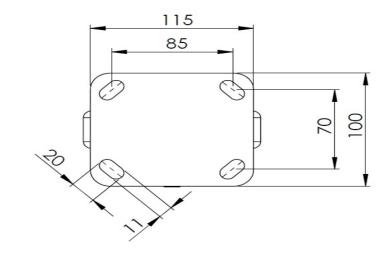

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.