


1112 2" Wide General Purposes Caster Series

PPR (grey) Wheel Diameter x Wheel Width 200 x 50mm

EAN

TW-4111208004035

Equipped with front brake, locking Casters. Welded Caster Fork. Zinc-Plated, Mounting Type - Top Plate. High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) wheel rim. Gray color, Bearing—Annual Ball Bearings.

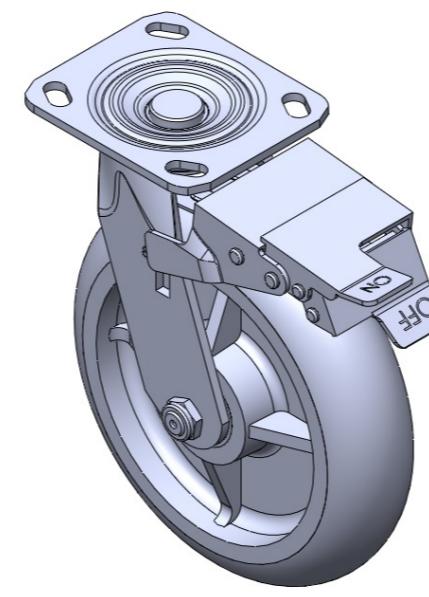

Picture may differ from original product

Drawings are for reference only and may differ from the product

Technical Data

 Imperial Metric

Wheel Diameter 8 "

Wheel Width 2 "

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 x " 3/8 "

Offset 1-13/16 "

Swivel Interference 12-11/16 "

Overall Height 9-1/2 "

Swivel Radius 5-13/16 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 408lbs

Load Capacity (Static) 613lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.6lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • • ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • •

Dimensions

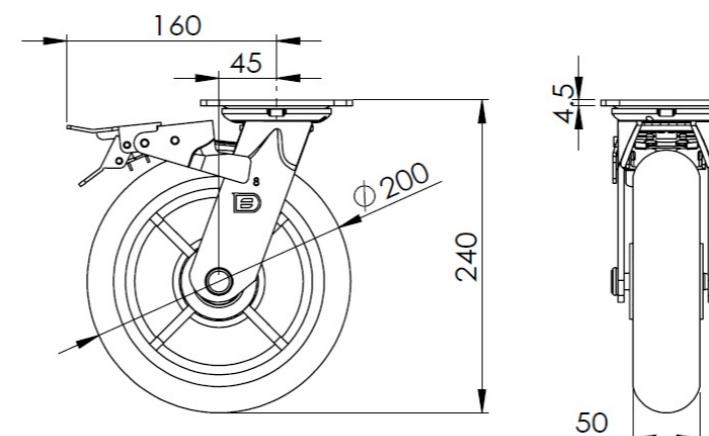

Mounting

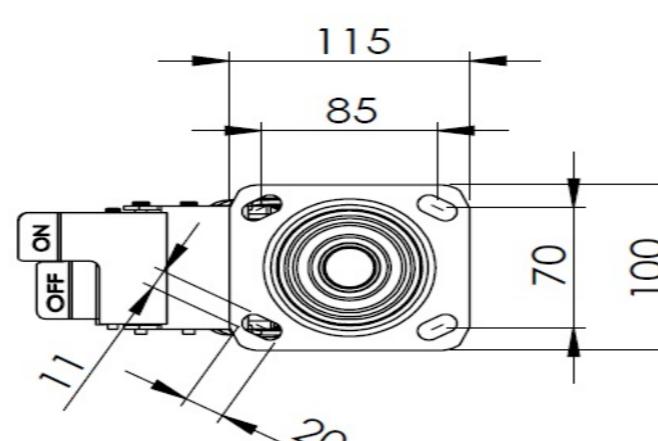

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com