

## 1116-SS-MJ Medium Duty Stainless Steel Caster Series

Nylon wheel (white) Wheel diameter × wheel width 100 x 32mm

EAN


TW-4111604002001

Swivel Casters, Riveted and Stamping Top Plate. Surface vibration, Mounting Type - Top Plate device. Reinforced Polypropylene and Wheel Tread. White, Bearing—Ball Bearings.

Wheel surface: thermoplastic

Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

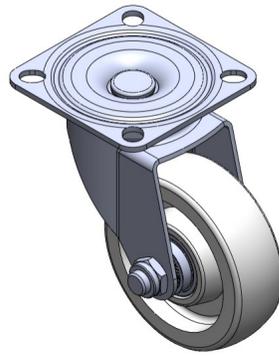

Picture may differ from original product

### Technical Data


Metric  Imperial

Wheel Diameter	100mm
Wheel Width	32mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	91 x 91mm
Bolt Hole Spacing	70 x 70mm
Plate Hole	13 x 10.5mm
Offset	42mm
Swivel Interference	184mm
Overall Height	134mm
Swivel Radius	92mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	120kgs
Load Capacity (Static)	180kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.90kgs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

### Dimensions

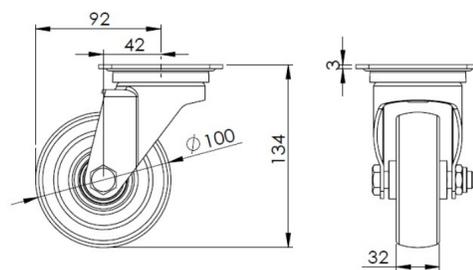

### Mounting

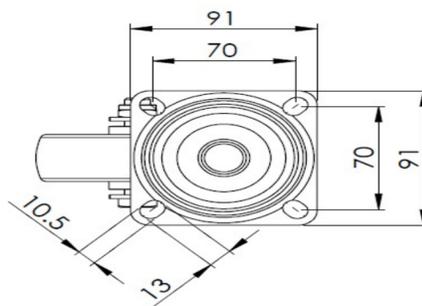

\* For any deviation between metric and imperial spec, please refer to the metric spec.