

## 1116-SS-MJ Medium Duty Stainless Steel Caster Series

Nylon Wheel Diameter × Wheel Width 100 x 32mm

EAN


TW-4111604002082

Swivel Casters, Riveted and Stamping Top Plate; surface vibration, Mounting Type - Top Plate device; thermoplastic Wheel Center and Wheel Tread; white, wheel-Plain Bearing.

Wheel surface: thermoplastic

Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

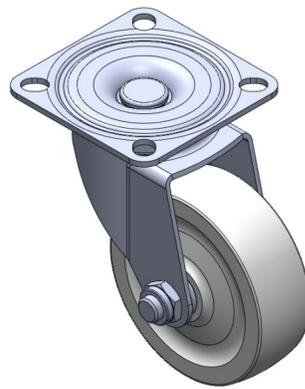

Picture may differ from original product

### Technical Data


Imperial  Metric

Wheel Diameter	4 "
Wheel Width	1-5/16 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	3-5/8 " x 3-5/8 "
Bolt Hole Spacing	2-3/4 " x 2-3/4 "
Plate Hole	9/16 " x 3/8 "
Offset	1-11/16 "
Swivel Interference	7-3/8 "
Overall Height	5-3/8 "
Swivel Radius	3-5/8 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	353lbs
Load Capacity (Static)	529lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.9lbs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

### Dimensions

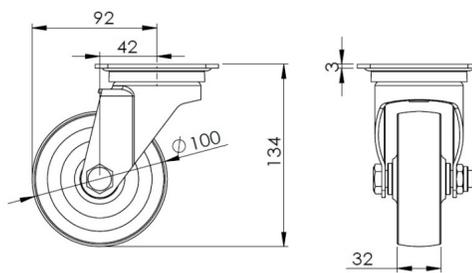

### Mounting

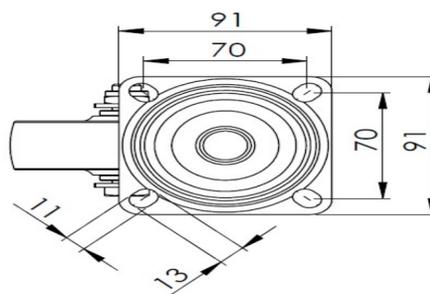

\* For any deviation between metric and imperial spec, please refer to the metric spec.