

1121 Series 25

Rubber wheel Wheel diameter x Wheel width 100 x 27mm


EAN

YJ-11210400062013

Swivel caster, base plate riveted with stamped feet - 82 x 40 hole spacing
 Galvanized finish, base plate mounting
 Thermoplastic wheel core, high-quality elastic rubber tread
 Wheel - center tube

Wheel surface: high-quality elastic rubber
 Wheel core: Thermoplastic (PA6)

Product descriptions are for reference only. The actual product shall prevail.

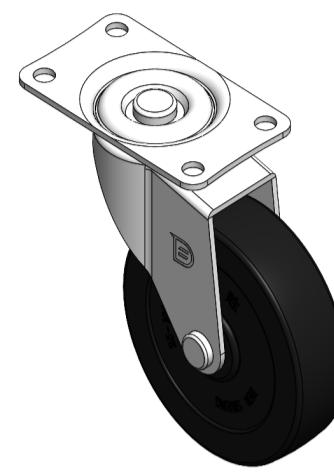

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 100mm

Wheel Width 27mm

Wheel Bearing wheels with a central tube

Plate size 100 x 58mm

Base plate hole spacing 82 x 40mm

Plate hole 8.8mm

Offset 44mm

Swivel Interference 188mm

Overall height 126mm

Swivel Radius 94mm

Hardness of tread 95±5° Shore A

Load capacity (dynamic) 80kgs

Load capacity (static) 120kgs

Temperature -20°C to +120°C

Stand Style activity

Stainless steel N/A

Conductive N/A

Anti N/A


Weight 0.55kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ○ ○Operating Noise ● ● ● ● ○ ○Floor Surface Preservation ● ● ● ● ○ ○

Dimensions

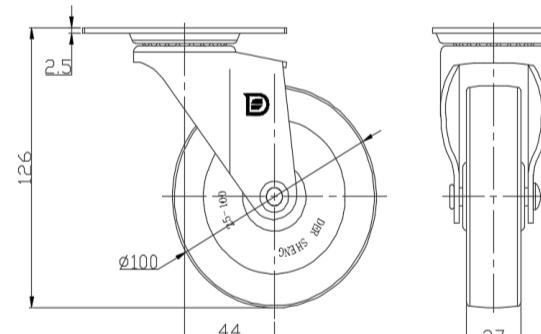

Mounting

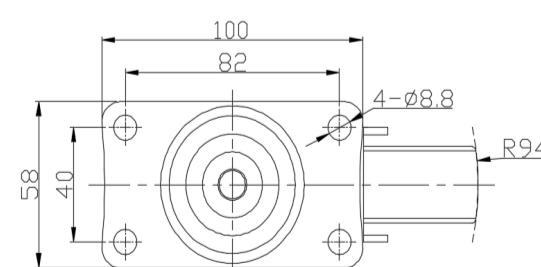

Drawings are for reference only and may differ from the product.

* For any deviation between metric and imperial spec, please refer to the metric spec.

© All rights reserved 2025 Deshang Shanghaolun www.dersheng.com