1129 Medical Caster Series

Dersheng Casters Keep Rolling

Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 100 x 31mm

EAN


YJ-11290400455106

Equipped with (180°) fixed castors. Threaded Fork - M12- P1.75 Surface Zine-Plated, Mounting Type - Threaded Stem High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) wheel tread Pearl-colored dark gray, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75
Threaded Size 1"

Offset 1-3/4 "
Swivel Interference 8-3/4 "
Overall Height 5-1/2 "
Swivel Radius 4-3/8 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 276lbs

Load Capacity (Static) 413lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Directional Lock

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.5lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


• • • • •

Floor Surface Preservation • • • • •

Dimensions

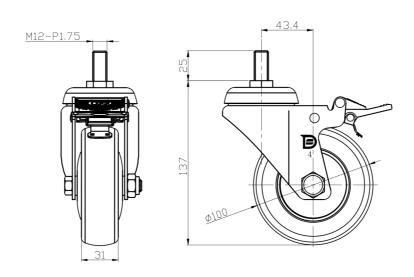

Mounting

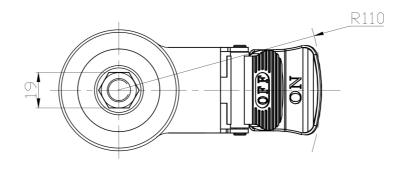

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.