

1129 Medical Caster Series

Rubber Wheel Diameter × Wheel Width 125 x 30.5mm


EAN

YJ-11290500068023

Casters with Side Brakes and With locking system. Riveted Stamping Fork—Ø21.6x56L
Zinc-Plated, Mounting Type - Cylindrical Stem
Reinforced Polypropylene Wheel Center with High-Quality Resilient Rubber Wheel Tread
Wheels—Central tube

Wheel surface: high-quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

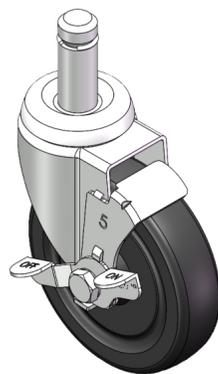

Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	5 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheel With Plain Bearing
Diameter	7/8 "
Stem Hole Spec	2-1/4 "
Offset	1-7/16 "
Swivel Interference	10-3/8 "
Overall Height	6-3/16 "
Swivel Radius	3-15/16 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	198lbs
Load Capacity (Static)	298lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.8lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

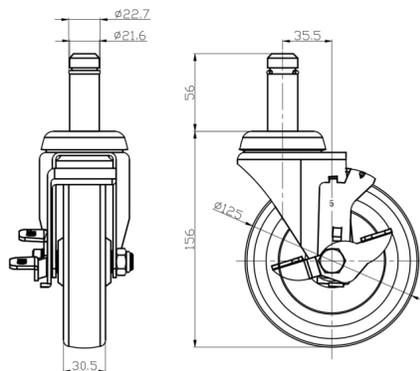

Mounting

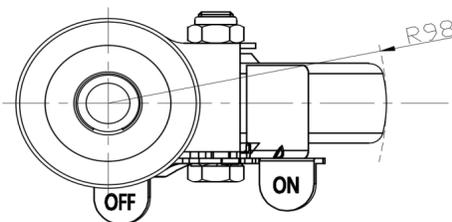

* For any deviation between metric and imperial spec, please refer to the metric spec.