

1139 Medium Duty General Purposes Caster Series



AQPU (brown round) Wheel Diameter × Wheel Width 75 x 30mm


EAN

YJ-11390300606073

Casters with Side Brakes and With locking system. Threaded Stem Riveted Pressed Fork – M16-P2
Zine-Plated, Mounting Type - Threaded Stem
Aluminum core, High Quality Polyurethane Wheel Tread
Brown, Bearing – Ball Bearings.

Wheel tread: Made of high-quality polyurethane
Wheel Center: aluminum core

Drawings are for reference only and may differ from the product

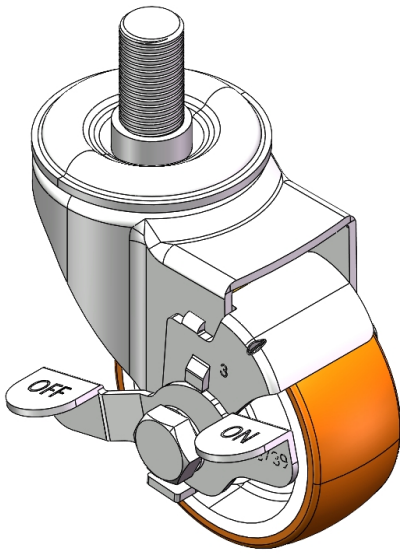

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	75mm
Wheel Width	30mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M16-P2
Threaded Size	29mm
Offset	38mm
Swivel Interference	160mm
Overall Height	102mm
Swivel Radius	80mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	160kgs
Load Capacity (Static)	240kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.75kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

Dimensions

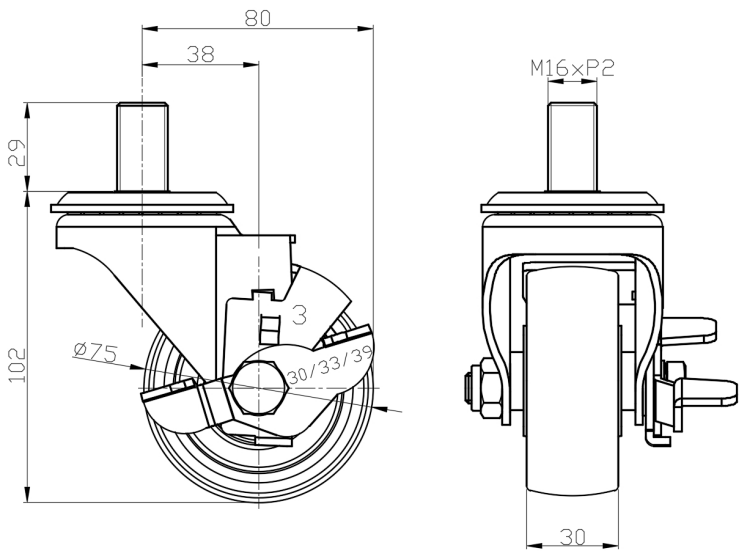

Mounting

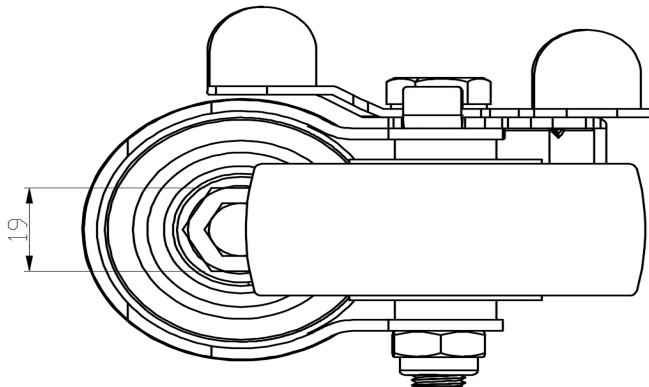

* For any deviation between metric and imperial spec, please refer to the metric spec.