1139 Medium Duty General Purposes Caster Series



W Resolute(Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN

YJ-11390400456113


Casters with a Total Brake and With locking system. Threaded Stem Riveted Pressed Fork --M12-P1.75.

Zine-Plated, Mounting Type - Threaded Stem.
Reinforced, impact-resistant polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Pearl-gray finish. Bearings—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR) Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 31mm

Wheels With Ball Bearings Wheel Bearing

M12-P1.75 **Threaded Stem** Threaded Size 25mm Offset 38mm 230mm Swivel Interference Overall Height 130mm **Swivel Radius** 115mm Hardness Of Tread 72±5° Shore A

135kgs Load Capacity (Dynamic) 202.5kgs Load Capacity (Static) Temperature -20°C to +60°C

Swivel Caster With Total Brake Fork Type

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.74kgs Standard ISO22883


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

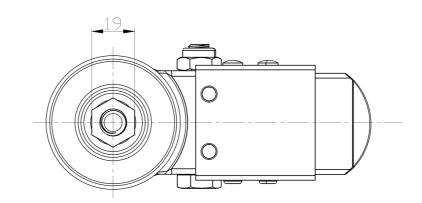

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.