1168 Levelling Caster Series

Dersheng Casters Keep Rolling

MRC (Black) Wheel Diameter × Wheel Width 100×36mm


EAN

YJ-11680400072133

Swivel Caster with Riveted Fork and Stamping Fork—D-shaped hole. Zine-Plated, Forkmount Mounting Type. Reinforced Polypropylene and tread. Black. Bearing—Ball Bearing.

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 36mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 40mm Swivel Interference 182mm Overall Height 142.5mm **Swivel Radius** 91mm Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 250kgs

Load Capacity (Static) 375kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.09kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

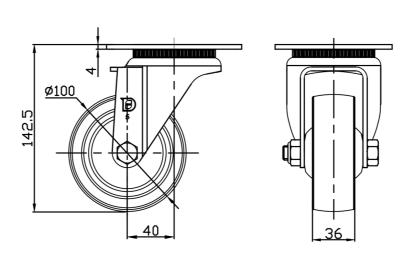

Mounting

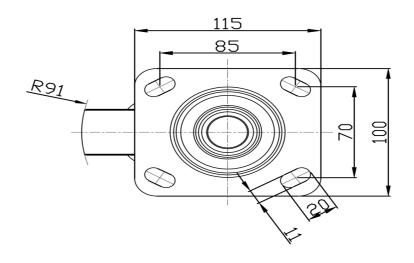

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.