

## XPU Series

Wheel Diameter x Wheel Width 250 x 100mm

EAN


YJ-12036110400204

Excellent Mechanical Properties, maintaining Heavy Load during high-speed movement; good wear resistance; not easily deformed.

Excellent resistance to chemicals, solvents, and corrosion.

Suitable for Forklift Trucks, electric Forklift Trucks, Heavy duty machines, AGVs, and automated industrial applications.

XPU Burgundy

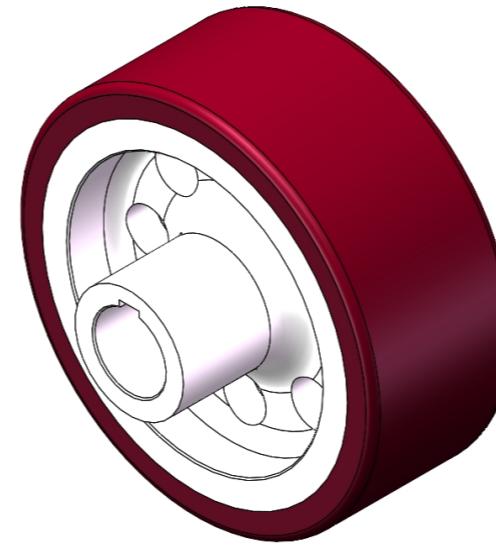

Wheel Center: Iron core

Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

Picture may differ from original product


## Technical Data

<input checked="" type="radio"/> Metric <input type="radio"/> Imperial
Wheel Diameter (D) 250mm
Wheel Width (T2) 100mm
Wheel installation — Hub Lenth (T1) 126mm
Wheel Mounting Bore Diameter 50mm
Keyway Width 14mm
Wheel Keyway Depth (H) 53.8mm
Load Capacity (Static) 3750kgs
Load Capacity at 4 km/h 2500kgs
Load Capacity at 6 km/h 2125kgs
Load Capacity at 10 km/h 1750kgs
Load Capacity at 16 km/h 1000kgs
Hardness Of Tread 92±5° Shore A
Temperature -20°C to +70°C
Tread Pattern —
Wheel centre/ rim Iron core/galvanized
Non-Marking Y
Conductive N/A
Anti N/A
Weight 15.52kgs
Standard ISO22883

## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • • ○

## 2D Dimensional Drawing of Drive Wheel

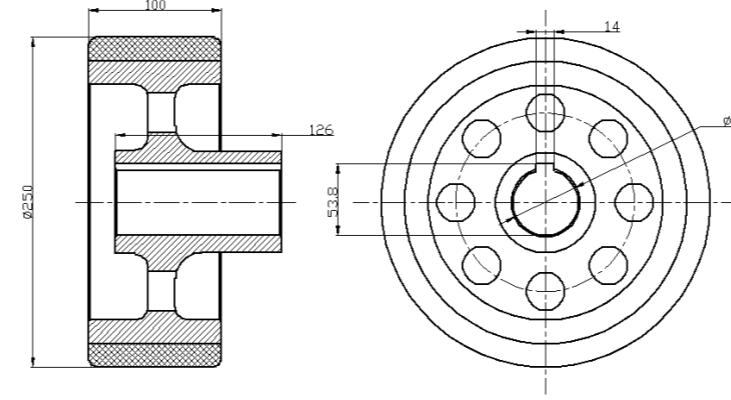

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com