

AXPU Series



Wheel Diameter × Wheel Width 440 x 90mm

EAN

YJ-12038851735114

Excellent Mechanical Properties, maintaining Heavy Load during high-speed movement; good wear resistance; not easily deformed.
Excellent resistance to chemicals, solvents, and corrosion.
Suitable for Forklift Trucks, Electric Stackers, Heavy duty machines, AGVs, and automated industrial applications.
XPU, Burgundy

Wheel Center: Aluminum core
Wheel Tread: High-quality polyurethane



Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter (D)	440mm
Wheel Width (T2)	90mm
Wheel installation — Hub Lenth (T1)	26mm
Wheel center-bore diameter (d)	90mm
Wheel Mounting Bolt Hole PCD Diameter	17mm
Wheel Mounting Bolt Hole PCD	126mm
# Of Wheel mounting bolt boles	8
Wheel mounting bolt hole (M)	10
Number of wheel mounting bolt holes	4
Load Capacity (Static)	5100kgs
Load Capacity at 4 km/h	3400kgs
Load Capacity at 6 km/h	2890kgs
Load Capacity at 10 km/h	2380kgs
Load Capacity at 16 km/h	1360kgs
Hardness Of Tread	92±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	—
Wheel centre/ rim	Aluminum
	core/passivation
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	13.89kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ● ○

2D Dimensional Drawing of Drive Wheel

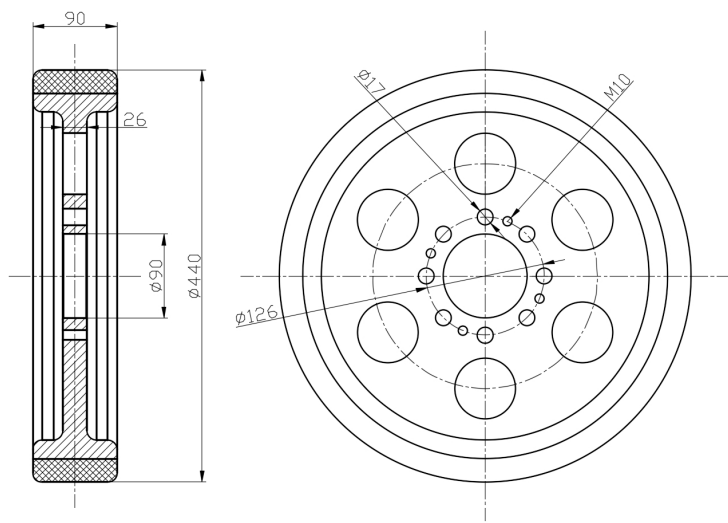

* For any deviation between metric and imperial spec, please refer to the metric spec.