

1102 B Type Caster Series

VQPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm


A

KS-11011020800542051

Portable Casters, Welded Caster Fork, blue paint finish
 Base plate Mounting Type device, 110x75mm Bolt Hole Spacing
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown
 Bearings—Ball Bearings

Wheel Tread: High-Quality Polyurethane
 Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product

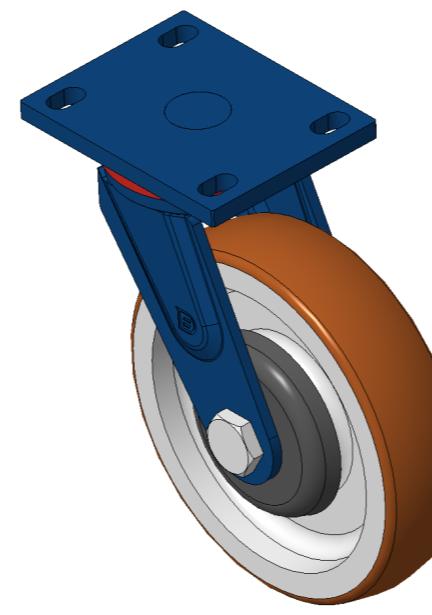

Picture may differ from original product


Technical Data

<input checked="" type="radio"/> Imperial <input type="radio"/> Metric
Wheel Diameter 8 "
Wheel Width 2 "
Wheel Bearing Wheels With Ball Bearings
Plate Size 5-9/16 " x 4-3/8 "
Bolt Hole Spacing 4-5/16 " x 3 "
Plate Hole 7/8 " x 9/16 "
Offset 2-1/2 "
Swivel Interference 13 "
Overall Height 9-15/16 "
Swivel Radius 6-1/2 "
Hardness Of Tread 92±5° Shore A
Load Capacity (Dynamic) 1764lbs
Load Capacity (Static) 2646lbs
Temperature -4°F to +158°F
Fork Type Swivel Caster
Stainless N/A
Electrical Conductivity N/A
Anti-Static N/A
Weight 16.7lbs
Standard ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

Dimensions

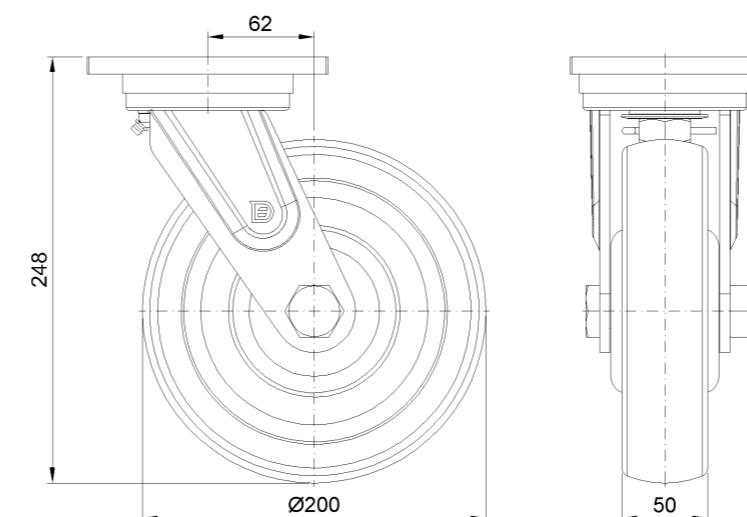

Mounting

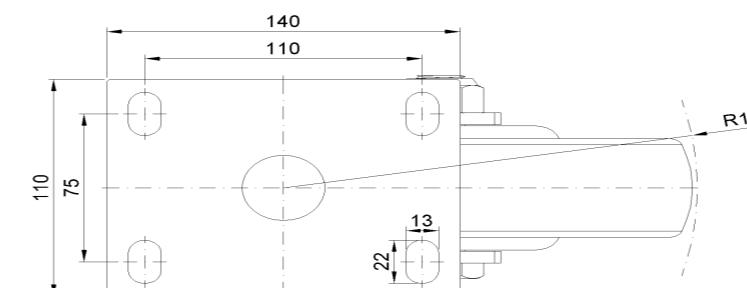

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com