1102 B Type Caster Series

Nylon Wheel Diameter × Wheel Width 100 x 32mm


EAN

KS-11020400072021

Swivel Caster with Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 90x60 Bolt Hole Spacing Natural thermoplastic Wheel Center and Wheel Tread Ball Bearing bearings with special Anti-thread wheel cover

Wheel tread: Thermoplastic (PA6) Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 32mm

Wheels With Ball Bearings Wheel Bearing

Plate Size 120 x 90mm **Bolt Hole Spacing** 90 x 60mm Plate Hole 12mm Offset 40.5mm Swivel Interference 186mm Overall Height 147mm **Swivel Radius** 93mm Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 250kgs Load Capacity (Static) 375kgs


Temperature -20°C to +80°C **Swivel Caster** Fork Type

Stainless N/A **Electrical Conductivity** N/A N/A Anti-Static Weight 2.34kgs Standard ISO22883


Advantages at a glance

Rolling Resistance Operating Noise Floor Surface Preservation • • • • • •

Dimensions

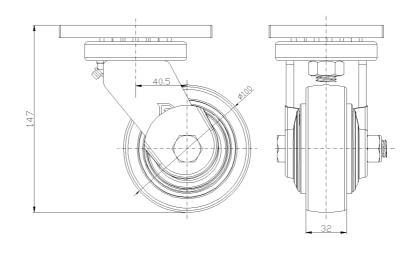

Mounting

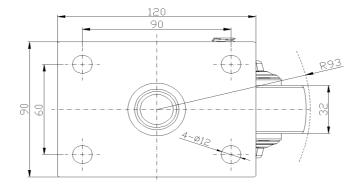

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.