1102 B Type Caster Series

QPU (Brown round) Wheel Diameter × Wheel Width 125 x 40mm

EAN


KS-11020500531021

Rigid Caster, Welded Caster Fork - 110x75 Bolt Hole Spacing Blue painted finish, Mounting Type - Top Plate, with special anti-twist wheel cover Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread Cast Iron brown, Bearing - Ball Bearing

Wheel tread: Made of high quality polyurethane

Wheel center: iron core/cast iron

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm

Bolt Hole Spacing 110x75mm

Plate Hole 22 x 13mm

Overall Height 170mm

Hardness Of Tread 92±5° Shore A

Tididiness of Fredd

Load Capacity (Dynamic) 450kgs

Load Capacity (Static) 675kgs

Temperature -20°C to +70°C

Fork Type Rigid Caster

Stainless N/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.01kgs


Standard ISO22883

Advantages at a glance


Rolling Resistance

Floor Surface Preservation • • • • •

Dimensions

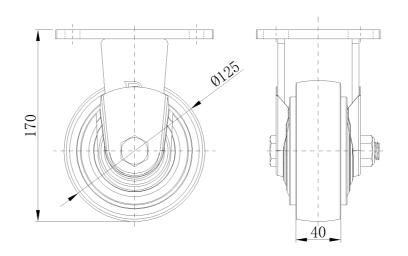

Mounting

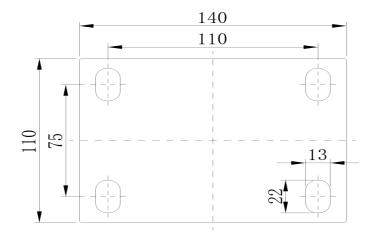

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.