1102 B Type Caster Series

Dersheng Casters Keep Rolling

QPU (brown flat) Wheel Diameter x Wheel Width 150 x 42mm

EAN


KS-11020600531061

Rigid Caster with Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing with special anti-wrap caps

Wheel Tread: Made of high-quality polyurethane

Wheel center: iron core/cast iron

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 6 "

Wheel Width 1-11/16 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 4-5/16 " x3"

 Plate Hole
 7/8 " x 9/16 "

 Overall Height
 6-13/16 "

Overall Height 6-13/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic)

Load Capacity (Static)

1984lbs

Temperature

-4°F to +158°F

Fork Type

Rigid Caster

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

7.9lbs

Standard

ISO22883

Advantages at a glance


Rolling Resistance

• • • • •


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

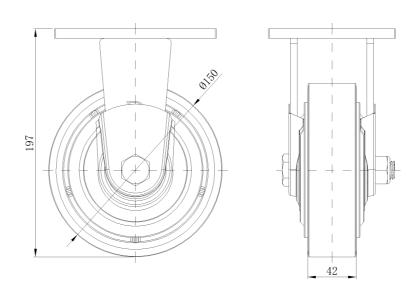

Mounting

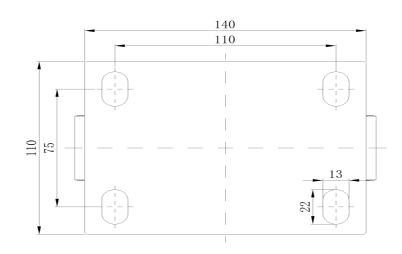

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.