


1102 B Type Caster Series

VQPU (brown round) Wheel Diameter x Wheel Width 150 x 42mm

EAN

KS-11020600541051

Rigid Caster, Welded Caster Fork - 110x75 Bolt Hole Spacing Blue painted finish, Mounting Type - Top Plate Cast Iron Wheel Center, High Quality Polyurethane tread Iron brown, Bearing - Ball Bearing

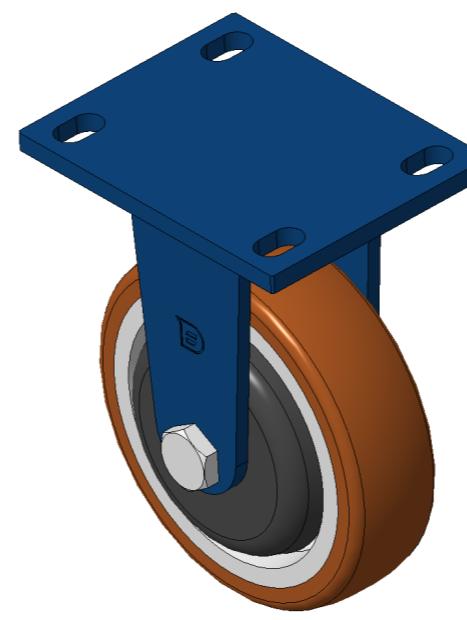

Wheel tread: Made of high quality polyurethane

Wheel center: iron core/cast iron

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Metric Imperial

| | |
|-------------------------|---------------------------|
| Wheel Diameter | 150mm |
| Wheel Width | 42mm |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 140 x 110mm |
| Bolt Hole Spacing | 110x75mm |
| Plate Hole | 22 x 13mm |
| Overall Height | 197mm |
| Hardness Of Tread | 92±5° Shore A |
| Load Capacity (Dynamic) | 670kgs |
| Load Capacity (Static) | 1005kgs |
| Temperature | -20°C to +70°C |
| Fork Type | Rigid Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 3.80kgs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|---------|
| Rolling Resistance | • • • • |
| Operating Noise | • • • • |
| Floor Surface Preservation | • • • • |

Dimensions

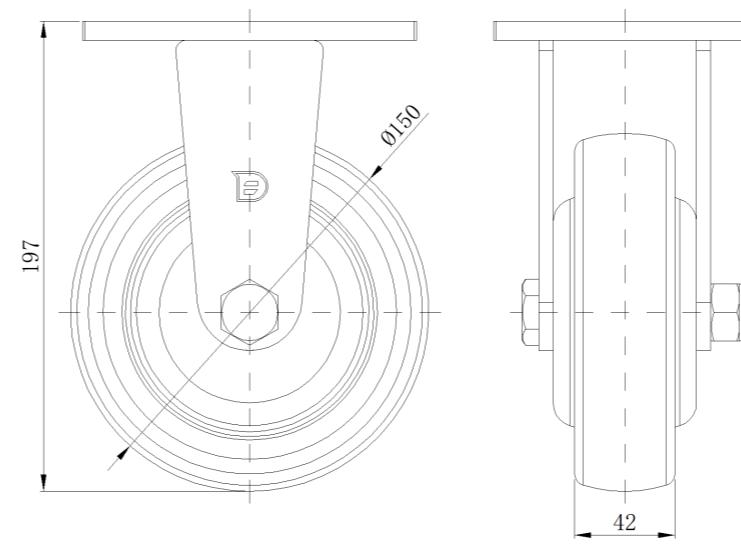

Mounting

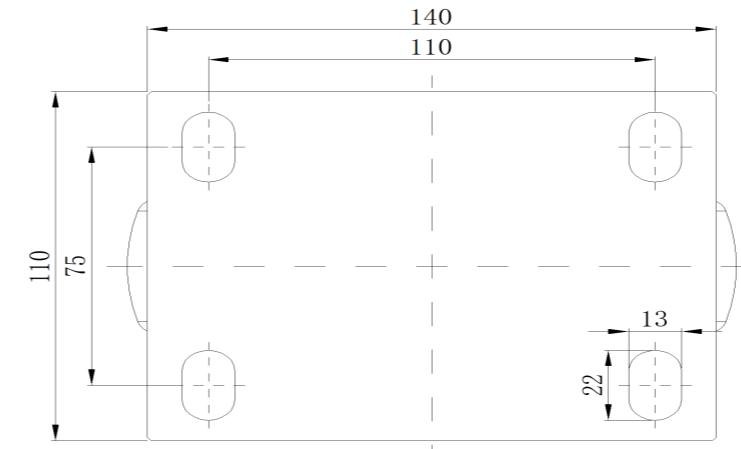

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com