## 1102 B Type Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 200 x 50mm

EAN

KS-11020800071011

Rigid Caster, Welded Caster Fork, blue paint finish Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Polypropylene Wheel Center, natural color Wheel Tread Bearing—Ball Bearing

Wheel surface: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product





Picture may differ from original product

## **Technical Data**

● Imperial ○ Metric

Wheel Diameter 8 "

Wheel Width 2 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 5-9/16 " x 4-3/8 "

Bolt Hole Spacing 4-5/16 " x3"

Plate Hole 7/8 " x 9/16 "

Overall Height 9-15/16 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 992lbs

Load Capacity (Static) 1488lbs

Temperature -4°F to +176°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 8.2lbs

Standard ISO22883

## Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• 0 0 0


Floor Surface Preservation  $\bullet \bullet \circ \circ \circ$ 

## Dimensions





Mounting

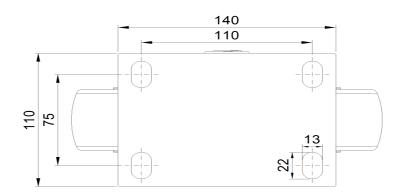

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.