

1102 B Type Caster Series

CPD Wheel Diameter x Wheel Width 200 x 50mm

EAN

KS-11020800291011

Rigid Caster, Welded Caster Fork, blue paint finish Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Polypropylene Wheel Center, Natural Color wheel tread Bearing—Ball Bearing

Wheel Tread: PP polypropylene
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data


Metric Imperial

| | |
|-------------------------|---------------------------|
| Wheel Diameter | 200mm |
| Wheel Width | 50mm |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 140 x 110mm |
| Bolt Hole Spacing | 110x75mm |
| Plate Hole | 22 x 13mm |
| Overall Height | 248mm |
| Hardness Of Tread | 72±5° Shore D |
| Load Capacity (Dynamic) | 400kgs |
| Load Capacity (Static) | 600kgs |
| Temperature | -12°C to +60°C |
| Fork Type | Rigid Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 3.45kgs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|-----------|
| Rolling Resistance | ● ● ● ● |
| Operating Noise | ● ● ● ○ ○ |
| Floor Surface Preservation | ● ● ● ○ ○ |

Dimensions

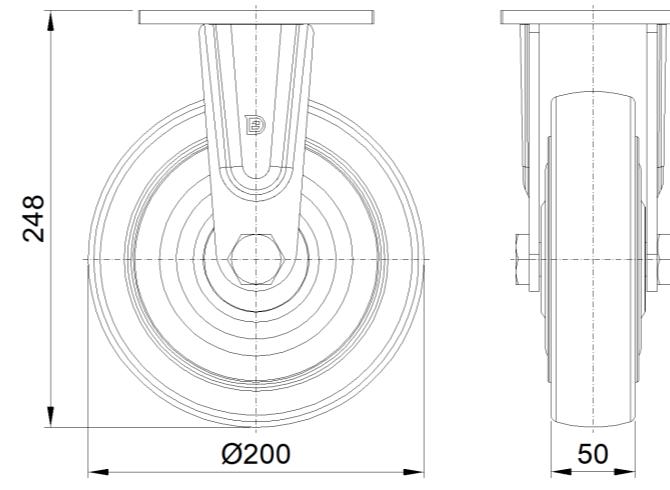

Mounting

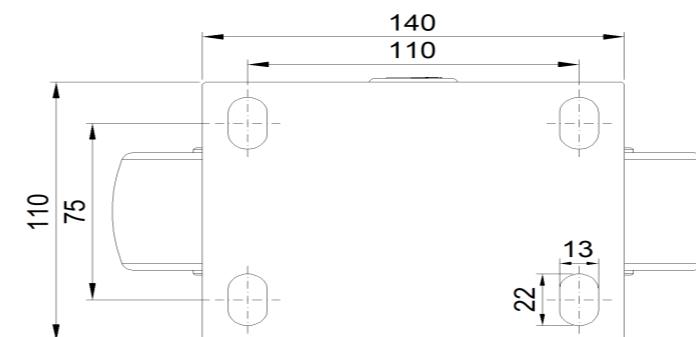

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com