1102 B Type Caster Series

QPU (Brown Flat) Wheel Diameter x Wheel Width 200 x 50mm

EAN

KS-11020800531021

Rigid Caster with Welded Caster Fork, blue-painted finish.

Mounting Type - Top Plate, 110x75 Bolt Hole Spacing.


Cast Iron core with High Quality Polyurethane Wheel Tread, Cast Iron brown.

Bearings—Ball Bearings.

Wheel tread: high-quality polyurethane wheel tread

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Wheel Width

● Imperial ○ Metric

Hardness Of Tread

Wheel Diameter 8 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 5-9/16 " x 4-3/8 "

Bolt Hole Spacing 4-5/16 " x3"

Plate Hole 7/8 " x 9/16 "

92±5° Shore A

 Plate Hole
 7/8 " x 9/16 "

 Overall Height
 9-15/16 "

Load Capacity (Dynamic) 1477lbs

Load Capacity (Static) 2216lbs

Temperature -4°F to +158°F

Fork Type Rigid Caster

Fork Type Rigid Cast
Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 11.2lbs

Standard ISO22883


Advantages at a glance


Rolling Resistance •

Operating Noise • • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

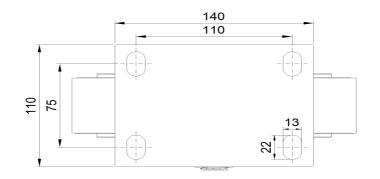

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.