1102 B Type Caster Series

Dersheng Casters Keep Rolling

QPU (Brown Flat) Wheel Diameter x Wheel Width 200 x 50mm


EAN

KS-11020800532061

Swivel Caster, Welded Caster Fork, blue paint surface Top Plate Mounting Type device, Hole spacing 110x75 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearing-Ball Bearing, with special Anti-thread wheel cover

Wheel tread: Made of high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Load Capacity (Static)

Standard

Wheel Diameter 200mm
Wheel Width 50mm

Wheel Bearing Wheels With Ball Bearings

1080kgs

ISO22883

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 22 x 13mm Offset 62mm 328mm **Swivel Interference** Overall Height 248mm **Swivel Radius** 164mm Hardness Of Tread 92±5° Shore A Load Capacity (Dynamic) 720kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.57kgs

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

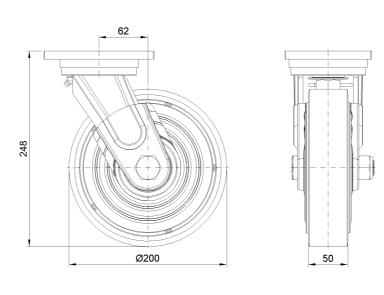

Mounting

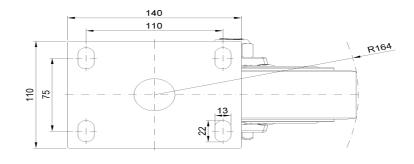

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.