1102 B Type Caster Series

QPU (Brown Flat) Wheel Diameter x Wheel Width 200 x 50mm


EAN

KS-11020800534051

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Floor Surface Preservation • • • • •



● Imperial ○ Metric

Wheel Diameter 8 "
Wheel Width 2 "

Technical Data

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 4-5/16 " x3"

 Plate Hole
 7/8 " x 9/16 "

 Offset
 2-1/2 "

 Swivel Interference
 14-1/2 "

 Overall Height
 9-15/16 "

 Swivel Radius
 7-3/8 "

Hardness Of Tread 92±5° Shore A
Load Capacity (Dynamic) 1587lbs
Load Capacity (Static) 2381lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

Stainless N/A


Electrical Conductivity N/A

Anti-Static N/A


Weight 14.6lbs

Standard ISO22883

Dimensions

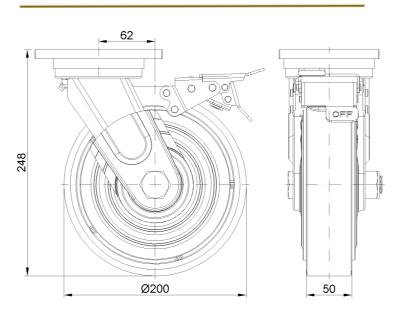

Mounting

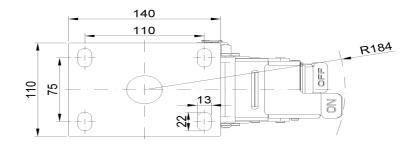

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.