1110-3 Series — Medi Series

Dersheng Casters Keep Rolling

TPR wheel (white dark gray) Wheel Diameter x Wheel Width 75 x 12mm

EAN

KS-11100302266023

Total Brake Caster, M10x25 thread, white Fork with reinforced Polypropylene Rustproof, Corrosion resistant, Attractive appearance, Economical, and flexible High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 50.5mm

Wheel Bearing Wheel With Plain Bearing

Threaded Stem M10x25

Threaded Size 25mm

Offset 22mm

Swivel Interference 158mm

Overall Height 93.5mm

Swivel Radius 79mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 30kgs

Load Capacity (Static) 45kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.23kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise • • •

Floor Surface Preservation • • • • •

Dimensions

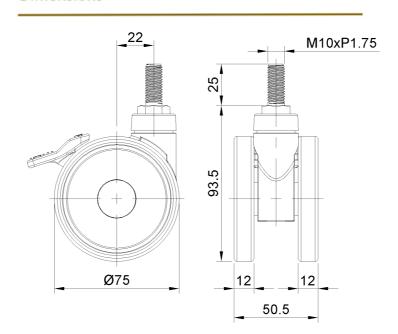

Mounting

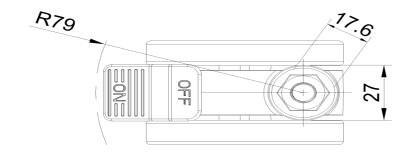

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.