

## 1112-1 2" Wide General Purposes Caster Series

CPU (Brown round) Wheel Diameter x Wheel Width 150 x 42mm

A

KS-11120601532011

Swivel Casters, Welded Caster Fork  
 Black painted finish, Mounting Type - Top Plate, 85x70mm Bolt Hole Spacing  
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown  
 Bearings—Ball Bearings, with plastic caps

Wheel Tread: High-Quality Polyurethane  
 Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	150mm
Wheel Width	42mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	35mm
Swivel Interference	230mm
Overall Height	190mm
Swivel Radius	115mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	600kgs
Load Capacity (Static)	900kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	3.10kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

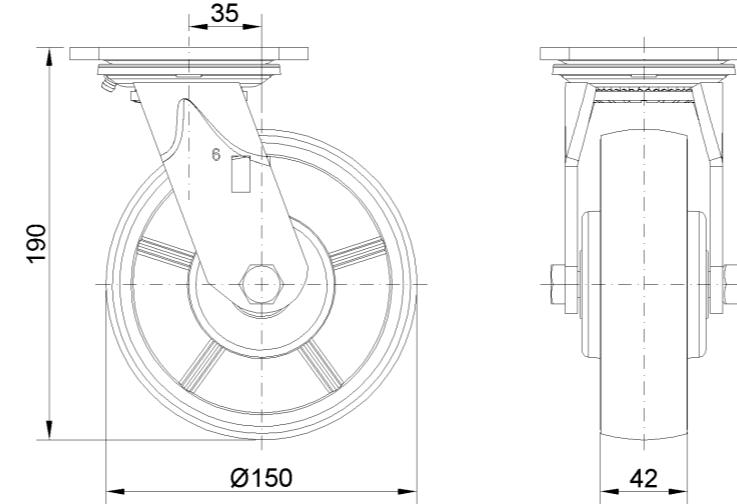

## Mounting

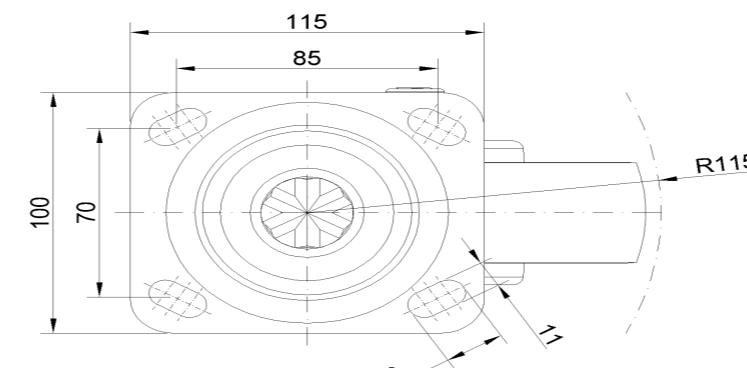

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com