## 1115-1 Economy -1 Spring Wheel Series

QPU (Brown round) Wheel Diameter × Wheel Width 150 x 42mm


EAN

KS-11150601532051B

Swivel Spring-loaded Caster with Welded Caster Fork
Blue painted finish, Mounting Type - Top Plate, Bolt Hole Spacing 105 x 78.5
Cast Iron core with High Quality Polyurethane Wheel Tread
Cast Iron brown, Bearing – Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

## Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 42mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 105 x 77.5mm Plate Hole 25 x 13.5mm Offset 40mm Swivel Interference 244mm Overall Height 198mm **Swivel Radius** 122mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 500kgs
Load Capacity (Static) 750kgs

Temperature -20°C to +70°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.11kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation

• • • • •

## Dimensions

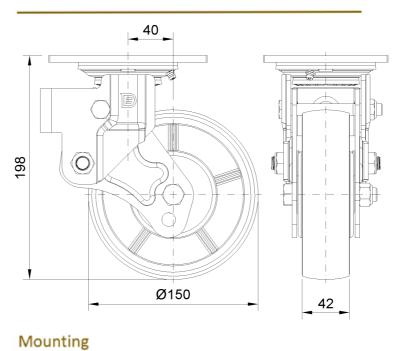

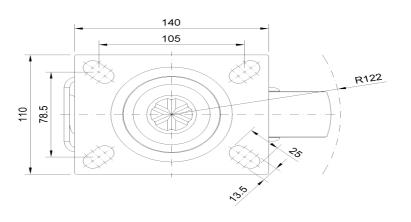

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.