# 1141 Kingpinless Caster Series

CPD Wheel Diameter × Wheel Width 100 x 32mm


EAN

KS-11410400291023

Rigid Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Polypropylene core, natural Wheel Tread Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel surface: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-5/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Overall Height 5-5/8 "

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 441lbs

Load Capacity (Static) 661lbs

Temperature 14°F to +140°F

Fork Type Rigid Caster
Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.3lbs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

#### **Dimensions**

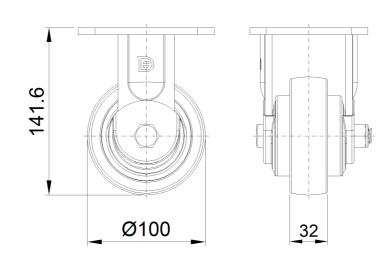

## Mounting

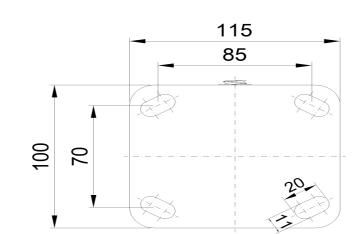

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.