# 1141 Kingpinless Caster Series

EQPU (brown round) Wheel Diameter x Wheel Width 125 x 50mm


EAN

KS-11410600551023

Rigid Caster with Welded Caster Fork
Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing
Cast Iron core with High Quality Polyurethane Wheel Tread, Cast Iron brown
Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

### **Technical Data**

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 50mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Overall Height 189mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 600kgs

Load Capacity (Static) 900kgs

Tomporature 20°C to +7

Temperature -20°C to +70°C

Fork Type Rigid Caster

Stainless N/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.03kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance


Operating Noise • • • •

Floor Surface Preservation • • • • •

#### **Dimensions**

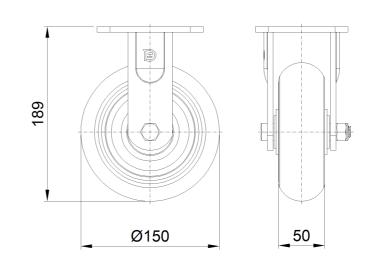

## Mounting

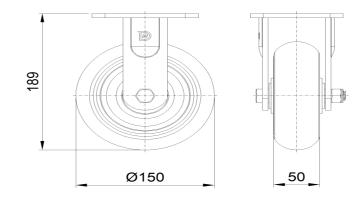

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.