# 1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

QPU (Brown round) Wheel Diameter × Wheel Width 125 x 40mm


EAN

KS-11420500532251

Swivel Caster, Welded Caster Fork Surface sprayed with blue paint, Mounting Type - Top Plate, Hole spacing 110x75 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearing-Ball Bearing

Wheel tread: Made of high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 4-5/16 " x3"

 Plate Hole
 7/8 " x 9/16 "

 Offset
 1-11/16 "

 Swivel Interference
 8-1/2 "

 Overall Height
 6-13/16 "

Overall Height 6-13/16 "

Swivel Radius 4-1/4 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic)992lbsLoad Capacity (Static)1488lbsTemperature-4°F to +158°FFork TypeSwivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 8.1lbs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### Dimensions

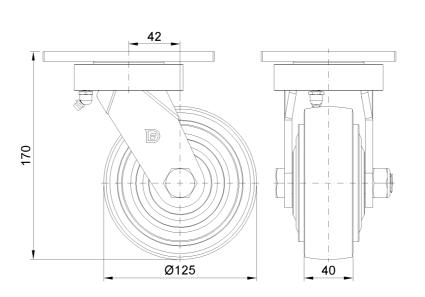

## Mounting

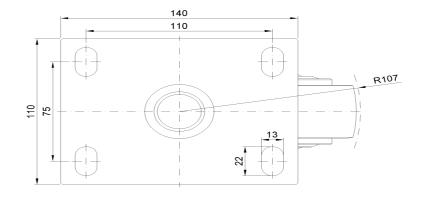

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.