# 1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

EQPU (brown arc) Wheel Diameter x Wheel Width 150 x 42mm


EAN

KS-11420600552111

Swivel Casters, Welded Caster Fork Surface sprayed with blue paint, Top Plate installation device, Hole spacing 85x70 Wheel core made of cast iron, high quality polyurethane Wheel Tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Imperial ○ Metric

Hardness Of Tread

Wheel Diameter

Wheel Width 1-11/16"

Wheel Bearing Wheels With Ball Bearings

6"

92±5° Shore A

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 3-3/8 " x 2-3/4 "

 Plate Hole
 7/8 " x 9/16 "

 Offset
 1-11/16 "

 Swivel Interference
 9-1/2 "

 Overall Height
 7-7/8 "

 Swivel Radius
 4-13/16 "

Load Capacity (Dynamic)

Load Capacity (Static)

1653lbs

Temperature

-4°F to +158°F

Fork Type

Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 9.6lbs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

### Dimensions

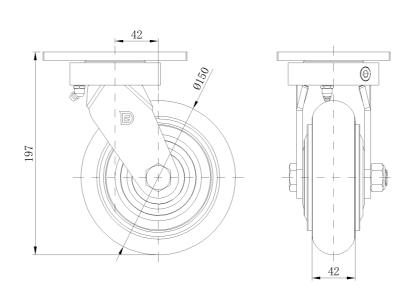

## Mounting

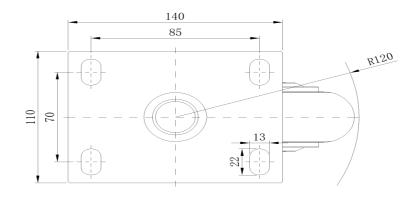

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.