1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel (window gray dark gray) Wheel Diameter x Wheel Width 100 x 18mm

EAN


KS-11460400457133

Rigid Casters, mortise-and-tenon Stamping Fork—Ø28x30L Window gray legs are made of polyamide reinforced material Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for Smooth rotation High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

	Metric O	Imperial
--	----------	----------

Wheel Diameter 100mm
Wheel Width 85.5mm

Wheel Bearing Wheels With Ball Bearings

Stem Diameter 28mm

Stem Length 30mm

Overall Height 120mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 100kgs
Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.76kgs

Standard ISO22881


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation

Dimensions

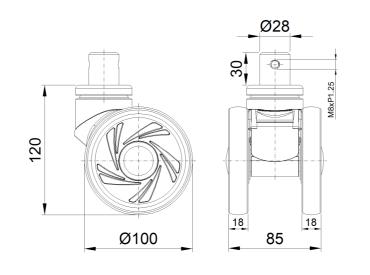

Mounting



 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.