1146 46 Ascendant Series Caster Series(All Plastic)

Dersheng Casters Keep Rolling

Resolute Rubber wheel (white dark gray) Wheel Diameter x Wheel Width 100 x 14mm


EAN

KS-11460491459413A

Long Total Brake Caster, Single Bolthole polyamide Fork - hollow Ø10.5
White Fork with polyamide reinforcement
Rustproof, Corrosion resistant, Attractive appearance, Economical, and flexible
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
White-dark gray, Bearing - Ball Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Bearing Wheels With Ball Bearings

2-7/16"

3/8 "

Single Bolt HoleCentre Hole

Offset 1-1/8 "
Swivel Interference 9 "
Overall Height 4-1/2 "
Swivel Radius 4-1/2 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.1lbs

Standard ISO22881

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

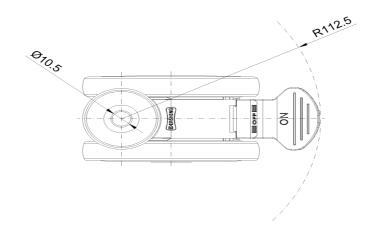

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.