1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel (white dark gray) Wheel Diameter x Wheel Width 100 x 14mm

EAN

KS-11460491459423A

Long Total Brake Casters, Single Bolthole polyamide legs—hollow Ø10.5

White legs are made of polyamide reinforced material.

Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for Smooth rotation.

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Dark gray, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter

2-7/16" Wheel Width

Wheel Bearing Wheels With Ball Bearings

3/8 "

Single Bolt HoleCentre Hole

1-1/8 " Offset

Swivel Interference

Overall Height 4-1/2 "

4-1/2 " Swivel Radius

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A N/A **Electrical Conductivity** Anti-Static N/A Weight 1.1lbs

Standard

ISO22881


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions



Mounting

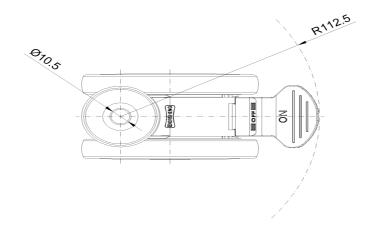

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.