# 1146 46 Ascendant Series Caster Series(All Plastic)



Resolute Rubber wheel (white dark gray) Wheel Diameter x Wheel Width 125 x 18mm

EAN

KS-11460500452013

Swivel Casters, 75x45 angled perforated Top Plate
White legs made of polyamide reinforced material
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
Dark gray, Bearing - Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### **Technical Data**

Metric O Imperial

Wheel Diameter 125mm
Wheel Width 85.5mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 96 x 69mm

Bolt Hole Spacing 75 x 45mm

Plate Hole 11 x 8.6mm

Offset 40mm

Swivel Interference 220mm

Overall Height 146mm

Swivel Radius 110mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 110kgs
Load Capacity (Static) 165kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.76kgs

Standard ISO22883


### Advantages at a glance

Rolling Resistance •


Operating Noise

Floor Surface Preservation • • • • •

## Dimensions

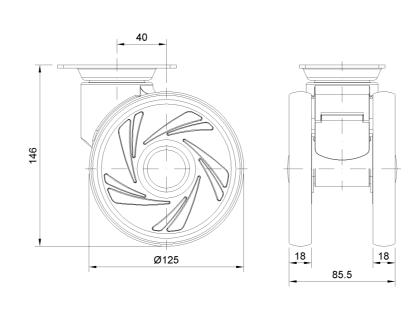

## Mounting

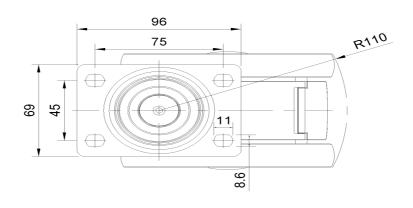

st For any deviation between metric and imperial spec, please refer to the metric spec.