1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel (window gray dark gray - large cover version) Wheel Diameter x Wheel Width 12


EAN

KS-11460500455153

Actual Casters, Threaded Stem M12x25
Window gray Casters made of polyamide reinforced material
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread
Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Dersheng Casters Keep Rolling

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm Wheel Width 85.5mm Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12

Threaded Length 25mm

Offset 40mm

Swivel Interference 220mm

Overall Height 144mm

Swivel Radius 110mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 110kgs

Load Capacity (Static) 165kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.66kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation

• • • • •

Dimensions

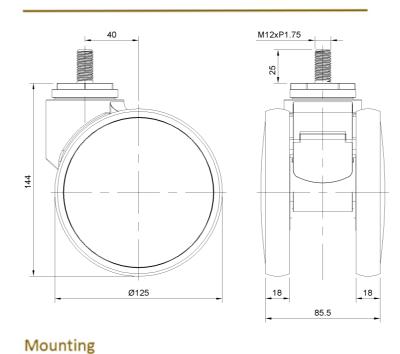

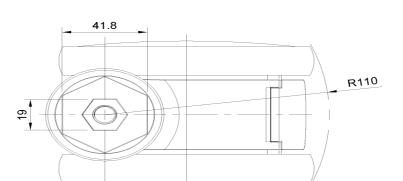

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.